


Data Sheet

Edgewise Series
020.D.201.05

Analog Meters Edgewise with Moving-Iron Movement

W 72 PrS
W 96 PrS
W 144 PrS

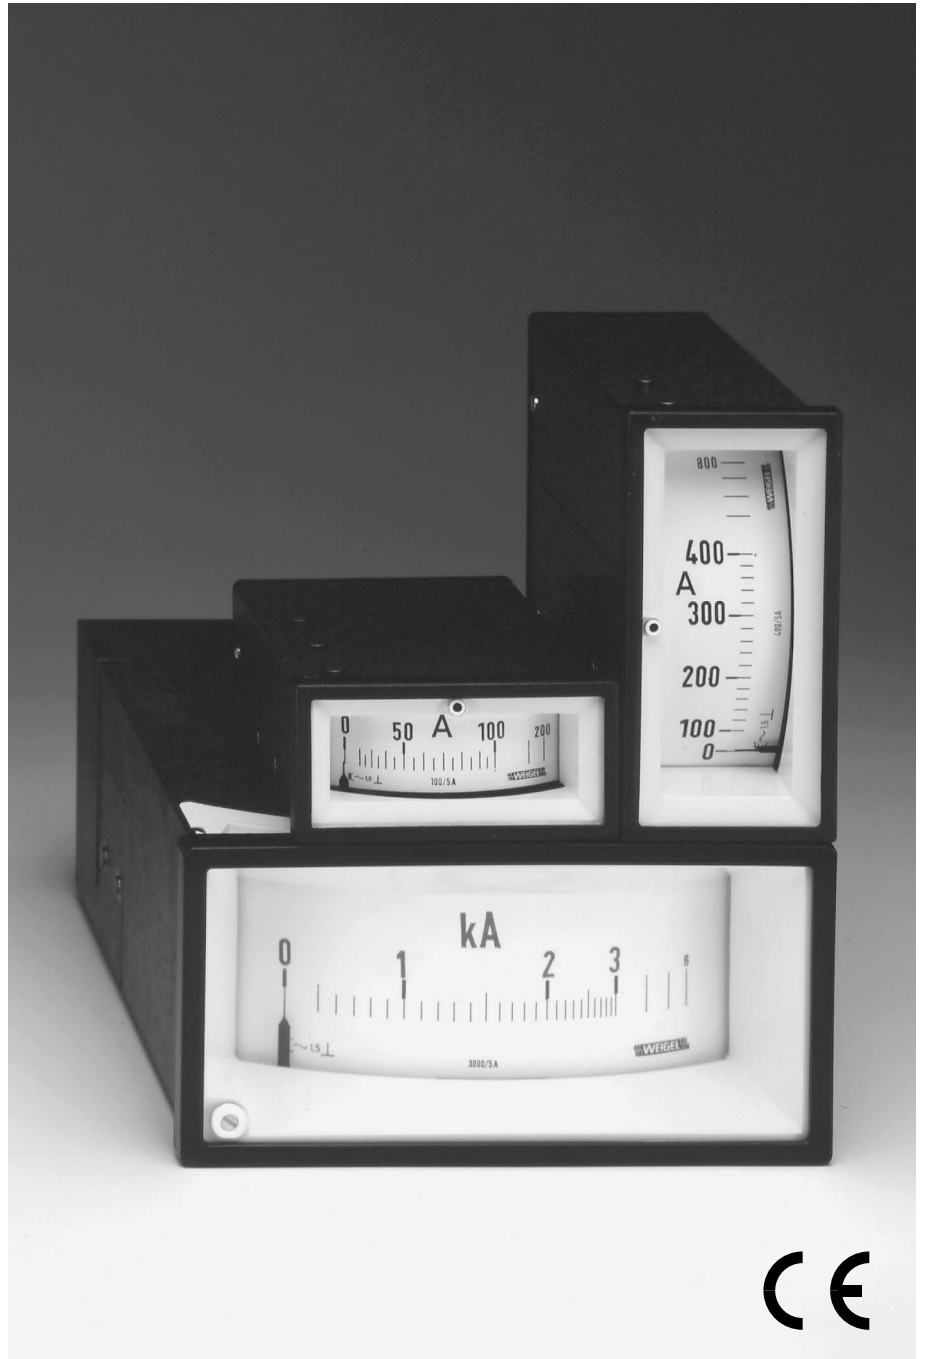

WEIGEL

Application

The edgewise moving-iron panel meters **W 72/96/144 PrS** with a curved dial are mainly used for the measurement of AC currents and voltages in the usual technical frequency range of $16^{2/3} \dots 100$ Hz (W 72/96 PrS) or $15 \dots 65$ Hz (W 144 PrS), special calibration for a definite frequency up to 1000 Hz on request.

Moving-iron meters indicate rms values practically independent of wave form even of high harmonics. Error of indication may occur for extreme wave forms (e.g. phase gating controls) and / or frequencies above 100 Hz.

These meters are **not** suitable for use with shunts or tachogenerators due to their high power consumption.

They are suitable to be mounted in switchboards, control panels, machine tool consoles and mosaic panels.

Movements

Moving-iron movement with pivot suspension. Spring loaded jewel bearings and silicon oil damping for vibration and shock resistance.

Mechanical Data

case details edgewise case suitable to be mounted in control / switchgear panels, machine tool consoles or mosaic panels, stackable

material of case pressed steel

material of window glass \blacktriangleright

colour of bezel black (similar to RAL 9005) \blacktriangleright

position of use vertical $\pm 5^\circ$

panel fixing screw clamps

mounting stackable next to each other (except W 144 PrS)

terminals

voltmeters and ammeters ≤ 3 A

hexagon studs, M3 screws and wire clamps C6 (W 72/96 PrS)

hexagon studs, M5 screws and wire clamps C10 (W 144 PrS)

ammeters >3 A

hexagon studs, M5 screws and wire clamps C10

voltmeters 600 V (W 72/96 PrS)

connector blades 6.3 x 0.8 for protective wire

dimensions (in mm) **W 72 PrS** **W 96 PrS** **W 144 PrS**

bezel 72 x 36 96 x 48 144 x 72

case 66 x 32 91 x 43 137 x 67

depth 94 107 174

panel cutout $68^{+0.7} \times 33^{+0.6}$ $92^{+0.8} \times 45^{+0.6}$ $138^{+1.0} \times 68^{+0.7}$

panel thickness 1 ... 25 1 ... 12 ≤ 40

weight approx. 0.28 kg 0.45 kg 1.2 kg

Electrical Data

measuring unit AC voltages or AC currents

frequency range **W 72/96 PrS** $16^{2/3} \dots 100$ Hz \blacktriangleright **W 144 PrS** $15 \dots 65$ Hz

power consumption
 voltmeters ≤ 100 V <4 VA <1.4 VA
 voltmeters >100 V <4 VA <2.5 VA
 ammeters ≤ 15 A <0.5 VA <0.3 VA
 ammeters >15 A <0.8 VA <0.3 VA

overload capacity (acc. to DIN EN 60 051 - 1)
 continuously 1.2 times rated voltage / current
 5 s max. 2 times rated voltage,
 10 times rated current

measurement category CAT III

operating voltage refer to Measuring Ranges

pollution level 2

enclosure code IP 52 case front side (W 72/96 PrS) \blacktriangleright
 IP 50 case front side (W 144 PrS)
 IP 00 for terminals without protection against accidental contact
 IP 20 for terminals protected against accidental contact

Measuring Ranges

measuring ranges **W 72/96 PrS** **W 144 PrS**

AC current ¹⁾ operating voltage
100; 150; 250; 400; 600 mA
1; 1.5; 2.5; 4; 5; 6; 10; 15; 25 A 300 V 150 V

AC voltage
6; 10; 15; 25; 40; 60; 100; 150 V 300 V 150 V
250 V; 400 V; 500 V 300 V –
600 V 600 V –

for use on VT/CT
N/1 A, N/5 A ¹⁾ 300 V 150 V
N/100 V, N/110 V ²⁾ 300 V 150 V

Please state transformer ratio when ordering.

¹⁾ full scale value = 2 times rated value (overload scaling) \blacktriangleright

²⁾ full scale value = 1.2 times rated value (– ” –)


Scaling

pointer bar / knife-edge pointer
 response time 1 s for full-scale deflection
 scale arrangement horizontal (left-hand zero)
 scale characteristics practically linear
 down to $\frac{1}{5}$ th of rated full-scale value.
 The initial scale is compressed.

scale division coarse-fine
 scale length **W 72 PrS** **W 96 PrS** **W 144 PrS**
 45 mm 67 mm 96 mm

overload scaling
 ammeters 2 times rated current
 voltmeters for use on 1.2 times rated voltage
 voltage transformers

\blacktriangleright for other ratings refer to "Options"



Analog Meters Edgewise with Moving-Iron Movement

Accuracy at Reference Conditions

accuracy class 1.5 \blacktriangleright according to DIN EN 60 051 - 1

reference conditions

ambient temperature 23 °C
position of use nominal position $\pm 1^\circ$
input rated measuring value
frequency 16²/₃ ... 100 Hz (W 72/96 PrS)
15 ... 65 Hz (W 144 PrS)
wave form sinusoidal, distortion factor <5%
others DIN EN 60 051 - 1

influences

ambient temperature 23 °C ± 2 K
position of use nominal position $\pm 5^\circ$
frequency ≥ 100 Hz (W 72/96 PrS)
 ≥ 65 Hz (W 144 PrS)
stray magnetic field 0.5 mT

Environmental

climatic suitability climatic class 2 \blacktriangleright
according to VDE/VDI 3540 sheet 2
operating temperature range -25 ... +40 °C \blacktriangleright
storage temperature range -25 ... +65 °C (W 72/96 PrS)
temperature range -25 ... +55 °C (W 144 PrS)
relative humidity $\leq 75\%$ annual average, non-condensing
shock resistance 15 g, 11 ms \blacktriangleright
vibration resistance 2.5 g, 5 ... 55 Hz (W 72/96 PrS)
1.5 g, 5 ... 55 Hz (W 144 PrS)

Rules and Standards

DIN 43 718	Measurement and control; front-frames and frontpanels of measurement and control equipment; principal dimensions
DIN 43 802	Line scales and pointers for indicating electrical measuring instruments; general requirements
DIN 16 257	Nominal positions and position symbols used for measuring instruments
DIN EN 60 051	Direct acting indicating analogue electrical measuring instruments and their accessories
-1	Part 1: Definitions and general requirements common to all parts
-2	Part 2: Special requirements for ammeters and voltmeters
-9	Part 9: Recommended test methods
DIN EN 60 529	Enclosure codes by housings (IP-code)
DIN EN 61 010 - 1	Safety requirements for electrical measuring, control and laboratory equipment Part 1: General requirements
DIN EN 61 326 - 1	Electrical equipment for measurement, control and laboratory use – EMC requirements Part 1: General requirements
DIN IEC 61 554	Panel mounted equipment – Electrical measuring instruments – Dimensions for panel mounting
VDE/VDI 3540 sheet 2	reliability of measuring and control equipment (classification of climates)

Options

measuring range

special measuring range deviating from standard
accuracy class 1.0 with fine scale division (as far as possible)
calibration for a definite frequency 100 ... 1000 Hz

case

window non-glaring glass
colour of bezel gray (similar to RAL 7037)
position of use horizontal or on request 15 ... 165°

performance

climatic suitability limited use in the tropics climatic class 3
according to VDE/VDI 3540 sheet 2
with operating temperature range -10 ... +55 °C
marine application non-certified
enclosure code IP 54 splash-water protected front
(without zero adjustment)

accessories


terminal protection against accidental contact
protective sleeves SW6, SW10 (ammeters >3A) for W 72/96 PrS

dial

scale arrangement vertical (bottom zero)
blank dial pencil-marked on initial and end values
scale division and figuring 0 ... 100%,
deviating from standard;
special calibration from customer's
non-linear graph or chart;
captions on request
additional lettering on request e.g. "generator"
additional figuring on request
coloured marks red, green or blue for important scale values
coloured segment red, green or blue within scale division
logo on the dial none or on request
zero position mechanically suppressed zero, no zero
adjustment, max. 40% of full-scale value
overload scaling (ammeters) no overload scale
expanded scale on request




Connections

AC voltage

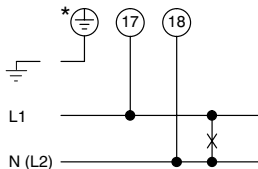


* W 72/96 PrS voltmeters 600 V

AC current

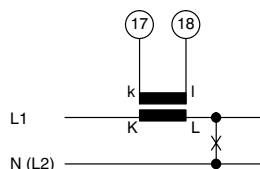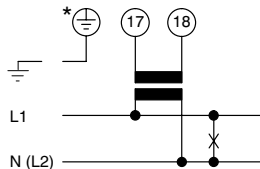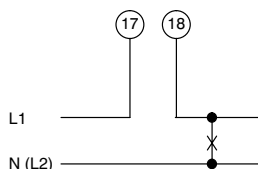


Dimensions

W 72/96 PrS

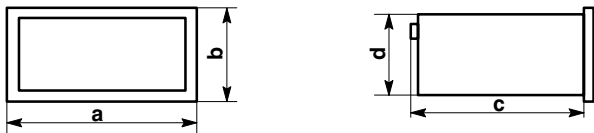


W 144 PrS

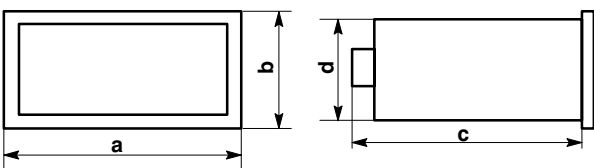

dimensions (in mm)	W 72 PrS	W 96 PrS	W 144 PrS
a	72	96	144
b	36	48	72
c	94	107	174
d	32	43	67

scales and position of use

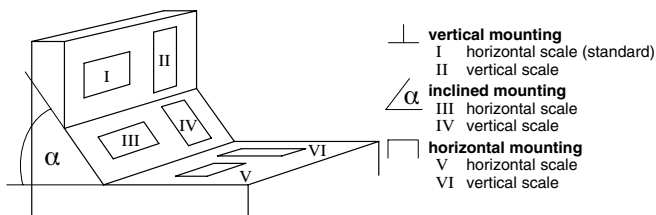

- ⊥ **vertical mounting**
 - I horizontal scale (standard)
 - II vertical scale
- ∠ **inclined mounting**
 - III horizontal scale
 - IV vertical scale
- ⊥ **horizontal mounting**
 - V horizontal scale
 - VI vertical scale

Ordering Information

type W	edgewise-type moving-iron panel meter
front dimensions 72 PrS 96 PrS 144 PrS	72 mm x 36 mm 96 mm x 48 mm 144 mm x 72 mm
measuring ranges	refer to preceding table
special measuring range	on request ²⁾
accuracy class	1.5 ¹⁾ 1.0 with fine scale division as far as possible
calibration	none ¹⁾ for a definite frequency 100 ... 1000 Hz ²⁾
window	glass ¹⁾ non-glaring glass
colour of bezel	black (similar to RAL 9005) ¹⁾ gray (similar to RAL 7037)
position of use	vertical ¹⁾ horizontal on request 15 ... 165° ²⁾
climatic suitability	class 2, -25 ... +40°C ¹⁾ class 3, -10 ... +55°C
marine application	none ¹⁾ non-certified
enclosure code	IP 52 (W 72/96 PrS) / IP 50 (W 144 PrS) ¹⁾ IP 54 splash-water protected front
terminal protection	none ¹⁾ protective sleeves SW6 / SW10
scale arrangement	horizontal ¹⁾ vertical
dial	scale division & measuring range alike ¹⁾ blank dial scale division and figuring 0 ... 100% deviating from standard ²⁾ calibration fr. non-linear graph or chart ²⁾ additional lettering on request ²⁾ additional figuring on request ²⁾ coloured marks red, green or blue ²⁾ coloured sector red, green or blue ²⁾
logo	WEIGEL ¹⁾ none OEM logo ²⁾
zero position	left or bottom zero ¹⁾ mechanically suppressed zero ²⁾
overload scaling (ammeters)	2 times rated current ¹⁾ no overload scale
expanded scale	on request ²⁾

¹⁾ Standard

²⁾ Please clearly add the desired specifications.

ordering example

W 72 PrS, measuring range 0 ... 250 mA, horizontal scale, vertical mounting, window non-glaring glass, WEIGEL logo

Weigel Meßgeräte GmbH

Postfach 720 154 • 90241 Nürnberg • Phone: 0911/42347-0
Erlenstraße 14 • 90441 Nürnberg • Fax: 0911/42347-39
Sales: Phone: 0911/42347-94
Internet: <http://www.weigel-messgeraete.de>
e-mail: vertrieb@weigel-messgeraete.de

– specifications subject to change without notice; date of issue 09/15 –

